

# Gemini-3

## CACHE FINDER

### metal detector

**Fisher's two box  
has a reputation for being  
the best. Goes deeper  
& traces farther!**

Two box treasure hunters know that Fishers Gemini-3 has a reputation for being the best there is. Designed to locate deep objects; depending on ground mineralization and target size, objects may be detected as deep as 20 feet! The Gemini-3 goes deeper, traces farther and is easier to use than any other cache finder in its class.

**Backed by Fisher's  
LIFETIME WARRANTY\***

### CONTROLS

#### RECEIVER

**POWER:** Off-on, push-pull switch.  
**SENSITIVITY:** Potentiometer. Controls sensitivity to targets and ground minerals.  
**BATTERY TEST:** Push button switch for battery strength indication on meter.


#### TRANSMITTER

**POWER:** Off-on, push-pull switch.  
**BATTERY TEST:** battery strength indication on meter.

### FEATURES

**Detects all metals:** Sensitive to large, deep objects or ore veins.  
**Crystal controlled:** 82 KHz transmitter and receiver.  
**Four mode operation:** Inductive Trace, Conductive Trace, Wide Scan Inductive Trace and Narrow Scan Inductive Trace.

**Optional Ground Plate Assembly** for long distance underground tracing  
**60 cycle noise reduction circuitry**  
**VCO audio target** response for precision pinpointing.  
**Operates on standard AA batteries**  
**Limited Lifetime Warranty**

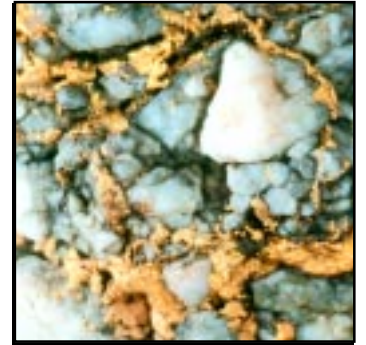

CALL 1-800-M-Scope-1 • 1-800-672-6731 • for a dealer near YOU



Fisher Research Laboratory  
Detectors & Locators Since 1931

# Gemini-3

## SPECIFICATIONS

Subject to improvement, modification or change without notice.

<b>DIMENSIONS</b>	Length on handle 49 ¼" Transmitter-Receiver Box Assy 9 ¼" x 12" x 6"	
<b>WEIGHT <sup>2</sup></b>	Complete .....7 lbs Transmitter .....2.4 lbs Receiver .....2.9 lbs Handle .....1.7 lbs	
<b>OPERATING MODES SEARCH</b>	Search 1. Narrow Scan, Inductive 2. Wide Scan, Inductive Trace	Trace 1. Inductive 2. Conductive
<b>FREQUENCY</b>	RF Search and Trace .....81.92 KHz Crystal Controlled Audio Target Response.....(VCO) <sup>3</sup>	
<b>AUDIO FUNCTIONS</b>	Target Response Meter .....2 ¼" x 1 ¾", Analog Speaker .....2 ¼" 100 ohm, Moisture-Proof Cone Headphones <sup>5</sup> .....¼" Jack, 8-16 ohms, Stereo/Mono	
<b>BATTERIES</b>	Receiver .....(8) AA 1.5v Transmitter .....(8) AA 1.5v	
<b>BATTERY LIFE</b>	Carbon Zinc .....30 hours <sup>2/6</sup> Alkaline .....50 hours <sup>2/6</sup>	
<b>WARRANTY</b>	Lifetime Limited Warranty* - *warranty may vary outside of the United States, warranty applies to the original purchaser only. see your dealer for details.	

## NOTES

1. Subject to improvement or modification without notice.
2. Approximate.
3. Voltage Controlled Oscillator. Volume and pitch both increase as target is approached for easier, more accurate pinpointing.
4. With optional ground plate assembly.
5. Optional stereo/mono headphones.
6. Use of headphones will significantly increase battery life.

## ACCESSORIES

<b>Standard Equipment:</b> Carrying Strap 3 piece handle Operating Manual	<b>Optional Equipment:</b> Fisher Phones Stereo Phones Ground Plate Assembly (for conductive tracing of pipes and cables)	Coupling Clamp Extra Long Handle Section for 3 piece handle (one foot longer for extra depth)
--	--	--

## ORDERING INFORMATION Call 1-800-M-Scope-1 • 1-800-672-6731 • for a Dealer Near You

**For More Information Contact:**  
**FISHER RESEARCH LABORATORY**  
 200 W. Willmott Rd., Los Banos, CA 93635-5501  
 Tel 209.826.3292 Fax 209.826.0416  
 www.fisherlab.com email: info@fisherlab.com

**Inquiries outside of the U.S. Mexico & Canada Contact:**  
**FISHER EXPORT DEPARTMENT**  
 280 State Street, Suite 202, North Haven, CT 06473, USA  
 Tel 203.230.4130 Fax 203.248.8093  
 email: fisher@exportdept.com